


SOCKELPROFIL SL16X5 SKIRTING PROFILE SL16X5



Das Sockelprofil SL16X5 stellt einen dezenten und innovativen Abschluss von Bodenbelag zu Wand, Fenster(rahmen) oder Treppenstufe her - dort, wo Anschluss- und Dehnfugen bautechnisch eingehalten werden müssen.

The SL16X5 skirting profile creates a discreet and innovative finish from flooring to wall, window(frame) or stair step - wherever connection and expansion joints have to be observed in terms of construction.

Geeignet für:
Parkett, Designböden, LVT und Fliesen

Suitable for:
Parquet, design floors, LVT and tiles

Für Belagstärken:
Ab 5 mm

For covering thicknesses:
From 5 mm

Breite Anschlussfuge:
6 - 13 mm

Wide connection joint:
6 - 13 mm

Montageart:
Clips (werkzeuglos)

Mounting:
Clips (without tools)

Profillänge:
200 cm

Profile length:
200 cm

Material:
Aluminium eloxiert

Material:
Anodized aluminum

Beschichtung Dicke:
Klasse 15 (DIN EN 17611)

Thickness of anodised layer:
Class 15 (DIN EN 17611)

Kratz- und Verschleißfestigkeit:
Klasse 33 (DIN EN 13329)

Scratch and wear resistance:
Class 33 (DIN EN 13329)

Notwendiges Zubehör:

- Clips (CLIP5)
- Montagehilfe (MH100) - optional

Required accessories:


- Clips (CLIP5)
- Mounting aid (MH100) - optional

Lichtsilber seidenmatt EV1
Light silver satin-finished EV1

Titan seidenmatt C31
Titan satin-finished C31

Mythossschwarz seidenmatt C35
Myth black satin-finished C35

Weiß seidenmatt RAL9016
White satin-finished RAL9016

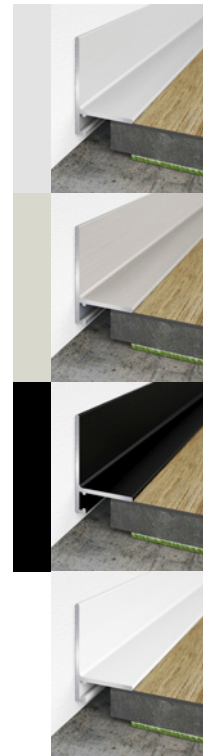

reddot winner 2020
best of the best



reddot winner 2020
best innovative product